

Peppercorn A2 Class 4-6-2 Locomotive

Thank you for your choice of the Bachmann Branchline Peppercorn 'A2' 4-6-2 locomotive.

Running in

The mechanism of this model requires running in (without a load) for approximately 1 hour in each direction at moderate speed.

Curves

Bachmann Branchline locomotives perform best on curves of second radius or greater (approx. 18 inches / 450 mm).

Body removal

Remove the screws at front and back of the chassis as indicated on the diagram.

DCC Decoder fitting to non DCC fitted loco

This model has an 8-pin NMRA/NEM 652 socket for a decoder with an appropriate plug. The plug should be aligned so that Pin 1 (Orange wire) is aligned to the numbered mark on the PCB. Note that the locomotive will run backwards if the decoder is reversed. We recommend that the running in as above be carried out using a DC power supply before moving on to fit a DCC decoder

Lubrication

When required, sparingly lubricate the motor bearings using plastic compatible light oil and the gear train with model grease.

Add-on detail parts.

The cylinder draincocks, vacuum pipes, electric lamps, front footsteps and cab doors fit as shown. The parts may not be suitable for use on tight curves - check before fitting permanently.

Replacement parts

When ordering parts please quote the catalogue number together with the livery of the model (if appropriate) and number of the part required. Parts are subject to availability.

Packets of couplers (item 36-030) and buffers (item 36-035) suitable for this model are available from retailers.


The model should be handled carefully as it has many finely detailed parts. It is not suitable for persons under 14 years.


Bachmann Europe Plc

Moat Way, Barwell, Leicestershire, LE9 8EY 01455 841756


www.bachmann.co.uk

A2 rev 1 03/10 E3152-IS001

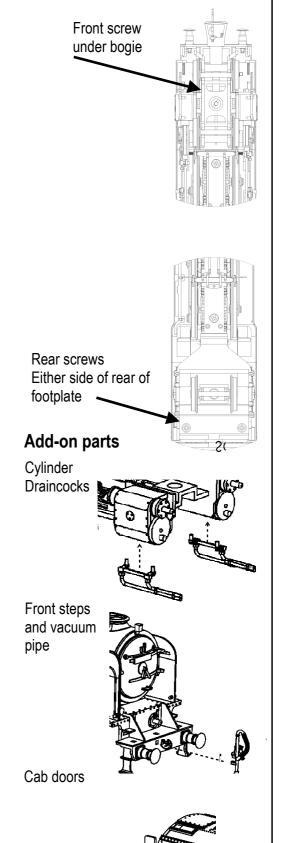





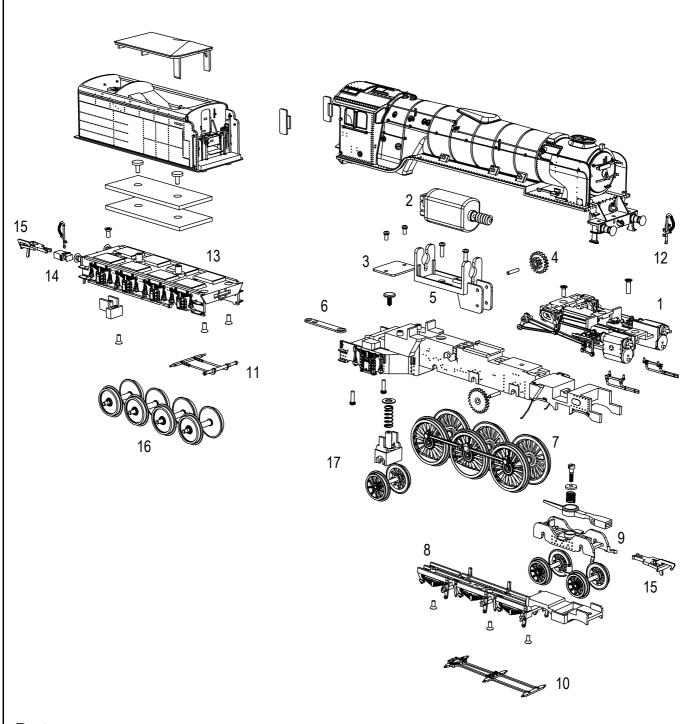

Parts