

# Ivatt Class 2 2-6-0 locomotive

Thank you for your choice of the Graham Farish Ivatt Class 2 2-6-0 locomotive.

## Running in

The mechanism of this model requires running in (without a load) for approximately 1 hour in each direction at moderate speed.

## Curves

This locomotive performs best on track with curves of second radius (**approx. 10.5 inches / 260 mm**) or greater. Please check clearances for the front and rear steps before final fitting.

## Body removal

The bodyshell is secured by a screw at front of baseplate as indicated

## DCC Decoder fitting to non DCC fitted loco

This model has an 6-pin NMRA/NEM 651 socket in the tender suitable for a decoder


with an appropriate fitting Align the decoder as indicated.

Run in as above using a DC power supply before fitting a DCC decoder

## Lubrication

When required, sparingly lubricate the motor bearings using plastic compatible light oil. Suitable lubricants are Bachmann E-Z Lube item 99984 or Woodland Scenics 'HobbyLube' Lite Oil item HL654.

## Location of add on parts

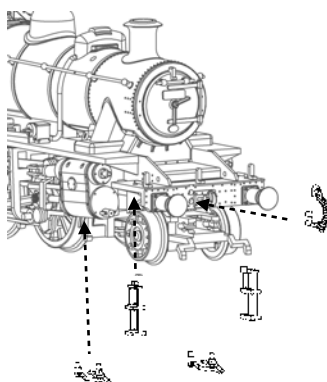

**Do not run Graham Farish N scale models with a DCC controller unless a DCC decoder has been fitted as damage to the motor may result if run as analogue loco "0"**

**Bachmann Europe Plc**

Moat Way, Barwell, Leicestershire,  
LE9 8EY

Tel: 01455 841756

[www.bachmann.co.uk](http://www.bachmann.co.uk)

2MT rev 1 12/12 F7262-IS001

© Bachmann Europe plc 2012

